

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with *ISO 14025* and *EN 15804+A2*

Owner of the Declaration	Bundesverband der Gipsindustrie e.V.
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-BVG-20220090-IAG1-EN
Issue date	04 April 2022
Valid until	03 April 2027

GYPSUM FIBREBOARDS IN ACCORDANCE WITH DIN EN 15283-2 OR ETA Bundesverband der Gipsindustrie e.V.

www.ibu-epd.com / <https://epd-online.com>



1. General information

Bundesverband der Gipsindustrie e.V.

Programme holder

IBU – Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Declaration number

EPD-BVG-20220090-IAG1-EN

This Declaration is based on the product category rules:

Gypsum plasterboards, 01.2019
(PCR checked and approved by the independent Expert Council (SVR))

Issue date

04 April 2022

Valid until

03 April 2027



Dipl.-Ing. Hans Peters
(Chairman of Institut Bauen und Umwelt e.V.)



Dr Alexander Röder
(Managing Director Institut Bauen und Umwelt e.V.)

GYPNUM FIBREBOARDS IN ACCORDANCE WITH DIN EN 15283-2 OR ETA

Holder of the Declaration

Bundesverband der Gipsindustrie e.V.
Kochstrasse 6-7
10969 Berlin

Declared product / Declared unit

Gypsum fibreboard in accordance with /DIN EN 15283-2/ or ETA
/Construction Products Regulation/
1m² (15 kg)

Scope:

This EPD applies for the member companies of the Bundesverband der Gipsindustrie e.V. in accordance with the current list of manufacturers

(https://www.gips.de/fileadmin/user_upload/Herstellerlisten_Ansprechpartner_EPDS/Herstellerlisten_fuer_EPDS_-_Gipsfaserplattenhersteller.pdf) for the products manufactured in Germany. The LCA takes into account specific information from the manufacturers and suppliers of components for the entire life cycle.

The owner of the Declaration shall be liable for the underlying information and proof; IBU shall not be liable with respect to manufacturer information, life cycle assessment data, or proof.

This EPD was drawn up in accordance with the specifications of the EN 15804+A2. This standard is referred to as EN 15804 hereinafter.

The owner of the Declaration shall be liable for the underlying information and proof; IBU shall not be liable with respect to manufacturer information, life cycle assessment data, or proof.

Verification

The EN 15804 European standard serves as the core PCR.

Independent verification of the Declaration and information provided in accordance with ISO 14025:2011

internally externally



Dr.-Ing. Wolfram Trinius
(Independent verifier)

2. Product

2.1 Product description / Product definition

The Declaration refers to gypsum fibreboard with a thickness of 12.5 mm and a weight per unit area of 15 kg/m².

(EU) Directive No. 305/2011 (CPR) applies for placing the product on the market in the EU/EFTA (with the exception of Switzerland). The product requires a Declaration of Performance taking consideration of DIN EN 15283-2:2009-12, gypsum boards with fibrous reinforcement – Definitions, requirements and test

methods – Part 2: Gypsum fibre boards; German version EN 15283-2:2008+A1:2009, and CE marking. Use is governed by the respective national regulations.

Alternatively, the product requires a Declaration of Performance taking into account an ETA and CE marking. Use is governed by the respective national regulations.

2.2 Application

Gypsum fibreboards are used in dry interior applications, e.g. as metal stud partitions, wooden frame partitions, ceiling cladding, floor screed, dry screed or hollow floors / area hollow flooring They can be used in buildings for public, private or commercial applications.

2.3 Technical data

Technical information is available in the information supplied by the manufacturers. Due to continuous updating of technical standards or approvals, such information is not listed within the framework of the Environmental Product Declaration.

Details on essential requirements can be taken from the CE mark and/or Declaration of Performance /Construction Products Regulation/.

The latest technical information can be queried from the manufacturers:

https://www.gips.de/fileadmin/user_upload/Herstellerlisten_Ansprechpartner_EPDS/Herstellerlisten_fuer_EPDS_-_Gipsfaserplattenhersteller.pdf.

The product's performance values correspond with the Declaration of Performance in terms of its essential properties in accordance with DIN EN 15283-2:2009-12, Gypsum boards with fibrous reinforcement – Definitions, requirements and test methods – Part 2: Gypsum fibre boards; German version EN 15283-2:2008+A1:2009.

Alternatively, the product's performance values correspond with the Declaration of Performance in terms of its essential properties in accordance with ETA.

2.4 Delivery status

Gypsum fibreboards can be supplied in various sizes taking consideration of standard dimensions and individual requirements.

Standard dimensions:

- Thickness: 10 – 42 mm (depending on the production process)
- Width: 1,000 – 1260 mm
- Length: 1,500 – 3100 mm

Boards can be cut up to sizes of 2,540 x 6,080 mm deviating from standard dimensions.

2.5 Base materials / Ancillary materials

Gypsum fibreboards comprise gypsum and recycled paper fibres. These two raw materials are combined and, after adding water as the only binding agent, are formed as boards and dried. The water binds the gypsum as well as penetrating and enveloping the fibres. This contributes to the high degree of stability and non-combustibility offered by gypsum fibreboards.

On account of their material composition, the boards can be used universally as construction and fire-protection boards in residential areas prone to moisture.

Gypsum fibreboards do not contain any substances which are hazardous to health. They do not emit any odours as they do not contain any glues.

Details on SVHC, CMR substances cat. 1A or 1B, and biocides:

The product contains substances from the ECHA candidate list of Substances of Very High Concern (SVHC) (date: 16.04.2021) exceeding 0.1% by mass /ECHA2021/: no

The product contains other CMR substances in categories 1A or 1B which are not on the candidate list exceeding 0.1% by mass in at least one partial product: no

Biocide products were added to this construction product, or it has been treated with biocide products (this then concerns a treated product as defined by the (EU) Regulation on Biocide Products No 528/2012): no

2.6 Manufacture

The manufacturing process comprises the steps depicted in Figure 1.

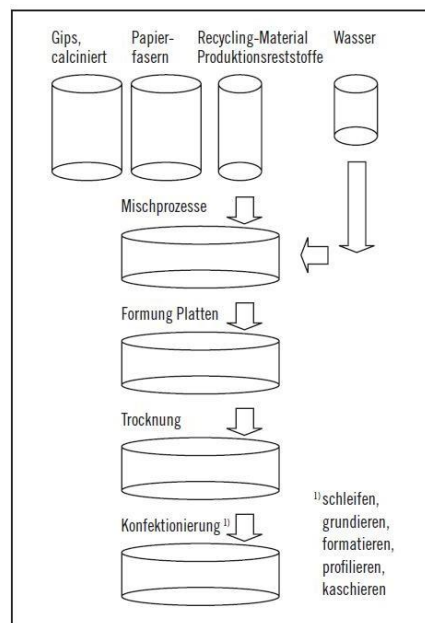


Fig. 1: Gypsum fibreboard manufacturing process in accordance with the /Gypsum Data Book/

	[Legend:]
	Gypsum, calcined
	Paper fibres
	Recycling material
	Production residue
	Water
	Mixing processes
	Forming boards
	Drying
	Packing ¹⁾
	¹⁾ grinding, priming, formatting, profiling, laminating

The manufacturing companies have implemented a quality management system and are certified to /DIN EN ISO 9001/.

2.7 Environment and health during manufacturing

Gypsum fibreboards are manufactured in plants permitted by emission laws in accordance with the

specifications of the Federal Immission Control Act. The plants have implemented an energy management system in accordance with */DIN EN ISO 50001/*. As of an aggregated rated thermal input of > 20 MW, gypsum plants are subordinated to emissions trading.

2.8 Product processing / Installation

Products are processed in accordance with the relevant Codes of Practice of the Bundesverband der Gipsindustrie e.V. and the manufacturers.

During the cutting, sawing or grinding processes for gypsum products, the occupational exposure limit value of 6 mg/m³ alveolar dust (A-dust) must be observed for calcium sulphate as a time-weighted average; in accordance with */TRGS 900/* "Occupational Exposure Limit Values"

2.9 Packaging

Gypsum fibreboards are stored on pallets and delivered without packaging. The wooden pallets used are available as reusable or disposable pallets.

2.10 Condition of use

The useful life of the gypsum fibreboards for interior applications reviewed here generally complies with the overall useful life of the building.

They are not subject to any exterior exposure.

2.11 Environment and health during use

During the use phase, no hazardous substances are emitted which exceed the limit values of the */AgBB/* evaluation scheme. Gypsum fibreboards have been tested by the Institut für Bauphysik */Scherer IBP/*. The test result indicates that the gypsum fibreboards are not associated with any adverse effects on the interior.

2.12 Reference service life

Reference service lives depend on the respective applications. In accordance with the BBSR "Nutzungsdauern von Bauteilen für Lebenszyklusanalysen nach dem Bewertungssystem Nachhaltiges Bauen (BNB)" (Useful lives of components for LCAs in accordance with the Sustainable Building evaluation system (BNB)), last revised 22.02.2017, amounts to > 50 years for walls, for example, in accordance with code number 342.411 "Nichttragende Innenwände – Ständersysteme" (Non-load-bearing interior walls – Stud systems).

There are no influences on ageing when the recognised rules of technology are applied.

2.13 Extraordinary effects

Fire

In accordance with EN 13501-1, gypsum fibreboards are generally classified as **A2-s1, d0** (s1 = no smoke, d0 = no flaming droplets/particles) with regard to their reaction to fire.

In accordance with DIN 4102-4, they are classified as building material class A2, "non-combustible".

Water

All gypsum products must be protected from permanent moisture penetration unless expressly designated by the manufacturer for this purpose. A Code of Practice is available from the Bundesverband der Gipsindustrie e.V. on restoration of components made of gypsum after flood damage */Code of Practice Flooding/*.

Mechanical destruction

As a general rule, mechanical damage can be compensated for using jointing compound thanks to the ease of repair associated with gypsum fibreboards without impairing their functional use. Gypsum fibreboards can be easily replaced with new boards in the event of major damage.

2.14 Reuse phase

Recycling

According to the Commercial Waste Ordinance, gypsum waste must be recycled. After treatment of the boards in special recycling plants for gypsum waste, recycled gypsum can be added to the manufacturing process for new boards following shredding and separation of the paper fibres. Alternatively, the reclaimed gypsum can be used in other areas suitable for gypsum (setting regulators for cement, agriculture, fertiliser production). The recycling plants for gypsum waste also ensure that any screws or nails are removed by a magnetic separator.

2.15 Disposal

Disposal in accordance with the */Waste code/*:

17 08 02 Gypsum-based building materials other than those mentioned in 17 08 01

Gypsum-based building materials adhere to the disposal conditions from landfill class 1 of the */Landfill Ordinance/* in the case of landfilling.

2.16 Further information

www.gips.de

3. LCA: Calculation rules

3.1 Declared unit

Declared unit

Name	Value	Unit
Declared unit	1	m ²

The results relate to a representative formulation valid for the members of the Bundesverband der Gipsindustrie e.V. with production in Germany, comprising several thicknesses and weights per unit area, which were extrapolated from the statistical

report to the average board weight of a 12.5 mm gypsum fibreboard.

3.2 System threshold

EPD type in accordance with */EN 15804/*: Cradle to gate, with

- options (A4–A5),
- Modules C1–C4 and
- Module D

(A1–A3 + C + D and additional modules: A4 and A5)

Modules A1–A3 (Product stage) include the production of raw materials taking consideration of framework conditions inherent in Germany and transport thereof, the provision of energy (German electricity mix), and the manufacturing processes required for the production of all components for the gypsum fibreboard product. As the gypsum fibreboards are generally transported to the construction site on reusable pallets with load securing straps, no packaging is taken into account.

Module A4 comprises transport to the construction site.

Module A5 includes installation on the construction site. Disposal of any packaging is not required here (unpacked product on reusable pallets).

Module C1 declares the manual deconstruction process.

Module C2 concerns transport to the disposal site.

Module C3 comprises the shredding and preparation of the gypsum fibreboards.

Module C4 is generally not considered, as the Commercial Waste Ordinance provides for gypsum waste to be sent for recycling. In this LCA, a landfill scenario is also calculated in order to cover legal exceptions to the Commercial Waste Ordinance.

Module D contains potential credits from gypsum recycling.

3.3 Estimates and assumptions

Approximations and estimates for the processes and materials were made in the corresponding modules for modelling the scenarios in the life cycle.

For Module C1, loss-free (100%) manual removal with hand-held tools is assumed. No losses (e.g. collection losses) during deconstruction are taken into account in the calculation of the end-of-life phase. The entire quantity produced is processed within the recycling process (scenario 1). In a further scenario, a landfill scenario is declared (scenario 2).

3.4 Cut-off criteria

In accordance with the target definition, all relevant input and output flows that occur in connection with the product under consideration were identified and quantified.

All available data from the production process is therefore taken into account in the LCA, i.e. all of the raw materials used, the thermal energy used, and the electricity consumption.

This also takes into account material and energy flows that contribute less than 1% of the mass or energy. The requirement that a maximum of 5% of the energy and mass input may be neglected is therefore complied with.

3.5 Underlying data

The data sets used are taken from the */GaBi/* databases.

The underlying database is based on the */GaBi/* 2021, Service Pack 40/CUP 2020.1 version. The */GaBi/* database provides the life cycle inventory data for raw and process materials, transport and energy.

3.6 Data quality

The data quality of the life cycle inventories is assessed based on their precision (measured, calculated, literature values or estimated), completeness (e.g. unreported emissions), consistency (degree of uniformity of the methods used), and representativeness (geographical, temporal, technological).

In order to comply with these aspects and thus ensure reliable results, first-hand industry data was used together with consistent underlying data from the */GaBi/* 2021 databases.

3.7 Period under review

The primary data recorded refers to 2020.

3.8 Allocation

The allocation methods used in underlying data (materials and energy) originating from the */GaBi/* databases are documented online at <http://www.gabi-software.com>.

All incineration processes are depicted by partial flow analyses of the respective materials.

An R1 factor of greater than 0.6 is assumed for all waste incineration plants.

Environmental loads from combustion processes in the construction, utilisation and disposal stages are allocated to the module in which they arise. Potential benefits from these processes are allocated to Module D.

The potential credits arising from energy substitution are awarded via average German data for electric energy and thermal energy from natural gas.

3.9 Comparability

As a general rule, EPD data can only be compared or evaluated when all of the data records to be compared have been drawn up in accordance with *EN 15804* and the building context and/or product-specific characteristics are taken into consideration.

The */GaBi/* underlying database was used (SP40).

4. LCA: Scenarios and additional technical information

Characteristic product features

Biogenic carbon

The proportion of biogenic carbon results from the paper fibres of the gypsum fibreboard. A carbon content of approx. 0.43 kg per kg of paper fibre is assumed.

Information describing the biogenic carbon content at the plant gate

Name	Value	Unit
Biogenic carbon in the product	0.52	kg C

Technical information on the application forms the basis for developing specific scenarios within the context of a building evaluation.

Transport to construction site (A4)

Name	Value	Unit
Transport distance	100	km

Capacity utilisation (including empty runs)	60	%
---------------------------------------------	----	---

Construction installation process (A5)

Installation in the building includes the electricity consumption for screwing or nailing the gypsum fibreboards. The metals required for this are not included in the calculation.

Name	Value	Unit
Power consumption	0.00375	kWh

End of Life (C1-C4)

The gypsum fibreboards are removed manually and transported by truck to a recycling plant (scenario 1) or to landfill (scenario 2). Module C2 is calculated at 50 km in each case.

Name	Value	Unit
For recycling (scenario 1):	15	kg
For landfilling (scenario 2):	15	kg

Reuse, recovery and recycling potential (D), relevant scenario information

Module D contains potential credits for the substitution of natural gypsum from the recycling process (Module C3).

5. LCA: Results

The following table depicts the LCA results for the life cycle of 1m² gypsum fibreboards. It should be noted that two scenarios are calculated at the disposal stage for the gypsum fibreboards, which start after the same deconstruction stage (C1) for both scenarios and differ in terms of disposal costs:

Scenario 1 includes the assumption of a 100% recycling scenario with steps C2, C3/1 and D/1. In this scenario, no landfilling takes place, so there are no contributions to indicators in C4/1 (disposal), which are listed as zero in the table below.

Scenario 2 includes complete disposal in a landfill with steps C2 and C4/2. No waste treatment is required for landfilling, which is why Module C3/2 has a zero value for all indicators and is listed as such in the table below. Similarly, there are no credits in Module D/2, which is therefore also shown as zero.

Important:

EP freshwater: This indicator was calculated as "kg P equiv." in accordance with the characterisation model (EUTREND model, Struijs et al., 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>).

DESCRIPTION OF THE SYSTEM THRESHOLDS (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End-of-life stage				Benefits and loads beyond the system thresholds
Raw material supply	Transport	Manufacture	Transport from the manufacturer to the site	Assembly	Use / Application	Maintenance	Repairs	Replacement	Renewal	Operational energy use	Operational water use	Deconstruction / Demolition	Transport	Waste treatment	Landfilling	Reuse, recovery or recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	MNR	MNR	MNR	ND	ND	X	X	X	X	X

LCA RESULTS – ENVIRONMENTAL IMPACTS according to EN 15804+A2: 1 m² = 15 kg gypsum fibreboard

Core indicator	Unit	A1-A3	A4	A5	C1	C2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
GWP total	[kg CO ₂ equiv.]	4.03E+0	1.38E-1	1.52E-3	0.00E+0	9.43E-2	2.23E+0	0.00E+0	0.00E+0	2.18E+0	-3.87E-2	0.00E+0
GWP fossil	[kg CO ₂ equiv.]	5.88E+0	1.32E-1	1.51E-3	0.00E+0	9.02E-2	2.23E+0	0.00E+0	0.00E+0	2.18E+0	-3.86E-2	0.00E+0
GWP biogenic	[kg CO ₂ equiv.]	1.86E+0	6.07E-3	5.03E-6	0.00E+0	4.15E-3	9.33E-2	0.00E+0	0.00E+0	9.24E-2	1.43E-4	0.00E+0
GWP luluc	[kg CO ₂ equiv.]	1.03E-2	3.12E-6	2.19E-6	0.00E+0	2.14E-6	3.94E-4	0.00E+0	0.00E+0	6.55E-4	-2.81E-4	0.00E+0
ODP	[kg CFC11 equiv.]	1.66E-11	1.39E-17	3.32E-17	0.00E+0	9.47E-18	5.98E-15	0.00E+0	0.00E+0	8.43E-16	-7.45E-17	0.00E+0
AP	[mol H ⁺ equiv.]	7.15E-3	1.24E-4	3.33E-6	0.00E+0	8.46E-5	6.00E-4	0.00E+0	0.00E+0	1.63E-3	-1.43E-4	0.00E+0
EP freshwater	[kg P equiv.]	2.97E-5	2.81E-8	4.03E-9	0.00E+0	1.92E-8	7.26E-7	0.00E+0	0.00E+0	3.91E-7	-1.32E-7	0.00E+0
EP marine	[kg N equiv.]	2.46E-3	3.75E-5	7.40E-7	0.00E+0	2.56E-5	1.33E-4	0.00E+0	0.00E+0	4.20E-4	-5.97E-5	0.00E+0
EP terrestrial	[mol N equiv.]	2.55E-2	4.20E-4	7.78E-6	0.00E+0	2.87E-4	1.40E-3	0.00E+0	0.00E+0	4.62E-3	-6.80E-4	0.00E+0
POCP	[kg NMVOC equiv.]	6.29E-3	1.10E-4	2.03E-6	0.00E+0	7.50E-5	3.65E-4	0.00E+0	0.00E+0	1.27E-3	-1.52E-4	0.00E+0
ADPE	[kg Sb equiv.]	1.34E-6	3.94E-9	4.37E-10	0.00E+0	2.69E-9	7.86E-8	0.00E+0	0.00E+0	2.04E-8	-3.75E-9	0.00E+0
ADPF	[MJ]	8.20E+1	1.86E+0	2.65E-2	0.00E+0	1.27E+0	4.78E+0	0.00E+0	0.00E+0	2.98E+0	-5.31E-1	0.00E+0
WDP	[m ³ world equiv., extracted]	2.79E-1	2.57E-4	3.29E-4	0.00E+0	1.76E-4	5.92E-2	0.00E+0	0.00E+0	2.38E-2	-2.32E-3	0.00E+0

Legend: GWP = Global warming potential; ODP = Ozone depletion potential; AP = Acidification potential of soil and water; EP = Eutrophication potential; POCP = Photochemical ozone creation potential; ADPE = Abiotic depletion potential – non-fossil resources (ADP substances); ADPF = Abiotic depletion potential – fossil fuels (ADP fossil fuels); WDP = Water deprivation potential (users)

LCA RESULTS – INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 m² = 15 kg gypsum fibreboard

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
PERE	[MJ]	2.25E+1	5.87E-3	1.18E-2	0.00E+0	4.01E-3	1.89E+1	0.00E+0	0.00E+0	1.72E+1	-5.49E-2	0.00E+0
PERM	[MJ]	1.68E+1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-	0.00E+0	0.00E+0	-	0.00E+0	0.00E+0
PERT	[MJ]	3.93E+1	5.87E-3	1.18E-2	0.00E+0	4.01E-3	2.12E+0	0.00E+0	0.00E+0	3.91E-1	-5.49E-2	0.00E+0
PENRE	[MJ]	8.21E+1	1.86E+0	2.65E-2	0.00E+0	1.27E+0	4.78E+0	0.00E+0	0.00E+0	2.99E+0	-5.33E-1	0.00E+0
PENRM	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PENRT	[MJ]	8.21E+1	1.86E+0	2.65E-2	0.00E+0	1.27E+0	4.78E+0	0.00E+0	0.00E+0	2.99E+0	-5.33E-1	0.00E+0
SM	[kg]	8.80E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	[m ³]	2.38E-2	1.05E-5	1.36E-5	0.00E+0	7.20E-6	2.45E-3	0.00E+0	0.00E+0	7.53E-4	-7.57E-5	0.00E+0

Legend: PERE = Renewable primary energy as primary energy carrier; PERM = Renewable primary energy resources as material utilisation; PERT = Total use of renewable primary energy resources; PENRE = Non-renewable primary energy as energy carrier; PENRM = Non-renewable primary energy as material utilisation; PENRT = Total use of non-renewable primary energy resources; SM = Use of

	secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water
--	---------------------------------------------------------------------------------------------------------------------------------------

LCA RESULTS – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 m² = 15 kg gypsum fibreboard

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
HWD	[kg]	4.43E-7	1.81E-10	1.10E-11	0.00E+0	1.24E-10	1.98E-9	0.00E+0	0.00E+0	4.55E-8	-2.69E-8	0.00E+0
NHWD	[kg]	6.32E-2	1.90E-4	1.88E-5	0.00E+0	1.30E-4	3.39E-3	0.00E+0	0.00E+0	1.50E+1	-1.13E-4	0.00E+0
RWD	[kg]	2.79E-3	2.00E-6	4.03E-6	0.00E+0	1.37E-6	7.25E-4	0.00E+0	0.00E+0	3.39E-5	-9.49E-6	0.00E+0
CRU	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.89E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MER	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EEE	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

Legend HWD = Hazardous waste for disposal; NHWD = Non-hazardous waste for disposal; RWD = Radioactive waste for disposal; CRU = Components for reuse; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

LCA RESULTS – Additional impact categories acc. to EN 15804+A2 – optional: 1 m² = 15 kg gypsum fibreboard

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
PM	[Disease incidences]	1.27E-7	6.71E-10	2.80E-11	0.00E+0	4.59E-10	5.03E-9	0.00E+0	0.00E+0	2.02E-8	-6.49E-8	0.00E+0
IRP	[kBq U235 equiv.]	2.68E-1	2.86E-4	6.61E-4	0.00E+0	1.95E-4	1.19E-1	0.00E+0	0.00E+0	3.49E-3	-1.74E-3	0.00E+0
ETP-fw	[CTUe]	1.93E+1	1.32E+0	1.14E-2	0.00E+0	9.02E-1	2.04E+0	0.00E+0	0.00E+0	1.71E+0	-3.74E-1	0.00E+0
HTP-c	[CTUh]	8.96E-10	2.48E-11	3.14E-13	0.00E+0	1.70E-11	5.64E-11	0.00E+0	0.00E+0	2.53E-10	-8.09E-12	0.00E+0
HTP-nc	[CTUh]	3.84E-8	1.06E-9	1.16E-11	0.00E+0	7.26E-10	2.08E-9	0.00E+0	0.00E+0	2.79E-8	-4.53E-10	0.00E+0
SQP	[-]	2.69E+1	4.78E-3	8.45E-3	0.00E+0	3.27E-3	1.52E+0	0.00E+0	0.00E+0	6.22E-1	-1.67E-1	0.00E+0

Legend PM = Potential incidence of disease due to particulate matter emissions; IR = Potential effect of human exposure to U235; ETP fw = Potential toxicity comparison unit for ecosystems; HTP c = Potential toxicity comparison unit for humans (carcinogenic effect); HTP nc = Potential toxicity comparison unit for humans (non-carcinogenic effect); SQP = Potential soil quality index

Limitation note 1 – applies to the indicator “Potential impact of exposure to people to U235”: This impact category mainly addresses the potential impact of low-dose ionising radiation on human health in the nuclear fuel cycle. This does not consider impacts attributable to possible nuclear accidents and occupational exposure, nor to the disposal of radioactive waste in underground facilities. Potential ionising radiation from soil, radon and some building materials is also not measured by this indicator.

Limitation note 2 – applies for the indicators: “Potential for Abiotic Resource Depletion – Non-Fossil Resources”, “Potential for Abiotic Resource Depletion – Fossil Fuels”, “Water Depletion Potential (User)”, “Potential Ecosystem Toxicity Comparison Unit”, “Potential Human Toxicity Comparison Unit – Carcinogenic Effect”, “Potential Human Toxicity Comparison Unit – Non-Carcinogenic Effect”, “Potential Soil Quality Index”. The results of this environmental impact indicator must be used with caution, as the uncertainties in these results are high or there is only limited experience with the indicator.

6. LCA: Interpretation

The juxtaposition of the declared modules shows that the manufacturing phase (A1-A3) dominates the Life Cycle Assessment.

Transport to the construction site (A4) and to recycling or landfill (C2) at the end of life are of minor importance.

Greenhouse gas emissions also play a role in Module C3.

Module D shows the potential credits from the recycling process.

7. Proof

7.1 Leaching (sulphate + heavy metals)

On analysis according to the Landfilling Ordinance, the product displays the sulphate concentration in the saturation range which is typical for gypsum (approx. 1500 mg/l), resulting in disposal options only from landfill class I upwards.

Gypsum is classified as a listed substance in Water Hazard Class 1 (slightly hazardous for water).

Heavy metal content is significantly below the corresponding criteria for landfill class I.

Proper disposal in accordance with the parameters which can depend on use, sorting depth during deconstruction, collection (separately or together with other construction waste) and treatment, and must be determined by the responsible waste producer

7.2 Radioactivity

The product can be used without restriction with overall dose contributions of significantly lower than 0.3 mSv/a, determined on the basis of the index calculation to RP 112 and the radon concentration /BfS report/.

7.3 VOC emissions

The requirements in accordance with the /AgBB/ evaluation scheme are complied with in full (Scherer IBP):

TVOC3 ≤ 10 mg/m³

Carcinogens3 EU cat. 1 and 2 ≤ 0.01 mg/m³

TVOC28 < 1.0 mg/m³

SVOC28 ≤ 0.1 mg/m³

Carcinogens28 EU cat. 1 and 2 ≤ 0.001 mg/m³

Total VOC28 excl. LCI ≤ 0.1 mg/m³

Total VOC incl. LCI R = Σ Ci/LCii < 1

8. References

Standards

/DIN 4102-4/

DIN 4102-4:2016-05, Reaction to fire of building materials and building components – Part 4: Synopsis and application of classified building materials, components and special components

/DIN 4103-1/

DIN 4103-1:2015-06, Internal non-loadbearing partitions – Part 1: Requirements and verification

/DIN 4103-4/

DIN 4103-4:1988-11, Internal non-loadbearing partitions; partitions with timber framing

DIN EN ISO 9001

DIN EN ISO 9001:2015-11, Quality management systems – Requirements (ISO 9001:2015); German and English versions EN ISO 9001:2015

/DIN EN 13501-1/

DIN EN 13501-1:2019-05, Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests; German version EN 13501-1:2018

/ISO 14025/

DIN EN ISO 14025:2011-10, Environmental labels and declarations – Type III environmental declarations – Principles and procedures (ISO 14025:2006); German and English versions EN ISO 14025:2011

/DIN EN 15804/

EN 15804:2022-03, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products

/DIN EN ISO 50001/

DIN EN ISO 50001:2018-12, Energy management systems – Requirements with guidance for use (ISO 50001:2018); German version EN ISO 50001:2018

Other literature

/Waste key/

AVV – Ordinance on the List of Wastes dated 10 December 2001 (Federal Law Gazette I, p. 3379), last amended by Article 1 of the Ordinance dated 30 June 2020 (Federal Law Gazette I, p. 1533)

/AgBB/

AgBB – Requirements for indoor air quality in buildings: health-related evaluation of emissions by volatile organic compounds (VOC, VOC and SVOC) from construction products, Committee for Health-Related Evaluation of Construction Products <https://www.umweltbundesamt.de/themen/gesundheit/kommissionen-arbeitsgruppen/ausschuss->

zurgesundheitlichen-bewertung-von#agbbgesundheitsliche-bewertung-der-emissionen-vonfluchtigen-organischen-verbindungen-ausbauprodukten

/Construction Products Regulation/

Directive (EU) No 305/2011 of the European Parliament and Council dated 9 March 2011 establishing harmonised conditions for marketing building products and replacing Council Guideline 89/106/EEC; ABI. EU L88/5 dated 4 April 2011

/BBSR service life/

BBSR table "Service lives of components for LCA in accordance with BNB" "Sustainable Building Information Portal" of the Federal Ministry of Transport, Building and Urban Affairs: <http://www.nachhaltigesbauen.de/baustoff-und-gebaeuedaten/nutzungsdauern-von-bauteilen.html>; last revised 24 February 2017

/BfS report/

Natural radioactivity in building materials and the ensuing radiation exposure, Field of radiation protection and environment K. Gehrcke, B. Hoffmann, U. Schkade, V. Schmidt, K. Wichterey; urn:nbn:de:0221-201210099810 Federal Office for Radiation Protection, Salzgitter, November 2012: http://doris.bfs.de/jspui/bitstream/urn:nbn:de:0221-201210099810/3/BfS_2012_SW_14_12.pdf

/ECHA 2021/

European Chemicals Agency (ECHA) Candidate list of Substances of Very High Concern for Authorisation (published in accordance with Article 59(10) of the REACH Regulation): <http://echa.europa.eu/de/candidate-list-table>; last revised 16 April 2021

/Gypsum Data Book/

Gypsum Data Book Pub.: Bundesverband der Gipsindustrie e.V., Kochstrasse 6-7, 10969 Berlin Published on: www.gips.de (section: Publications / Books), last revised May 2013

/IBU 2021/

Institut Bauen und Umwelt e.V.: General instructions for the EPD range of Institut Bauen und Umwelt e.V. (IBU), version 2.0, Berlin: Institut Bauen und Umwelt e.V., 2021; www.ibu-epd.com

/Code of Practice Flooding/

Removing damage caused by flooding to components made of gypsum or gypsum plaster, BVG Information Service No. 01. Published on: www.gips.de (section: Download, Publications, Information services); last revised June 2013

/Scherer IBP/

Fraunhofer-Institut für Bauphysik IBP, Holzkirchen
Test report: Cross-sectional study on the emission potential of volatile organic compounds from gypsum components and gypsum products for interior applications (July 2010)
Published on: www.gips.de (section: Research association, Projects, 2010)

This report is supplemented by current measurement results.

/TRGS 900/

TRGS 900 "Occupational exposure limit values"
Version: January 2006, BArBl, edition 1/2006, pp. 41-55

Last amended and supplemented: GMBI 2021, pp. 893-894 [No. 39-40] (dated 02.07.2021)

/GaBi/

GaBi 10.0 dataset documentation for the software system and databases, Sphera Solutions GmbH, Leinfelden-Echterdingen, 2020
(<http://documentation.gabi-software.com/>)

/LCA tool/

BV Gips LCA tool, version 1.0; created by Sphera Solutions GmbH

/PCR, Part A/

Institut Bauen und Umwelt e.V., Berlin (pub.): Product category rules for building-related products and services, Part A: Calculation rules for the Life Cycle Assessment and requirements on the project report, in accordance with EN 15804+A2:2019, version 1.1.1

/PCR: Gypsum boards/

Institut Bauen und Umwelt e.V., Berlin (pub.): Product category rules for building-related products and services, Part B: Requirements on the EPD for gypsum plasterboards, version 1.7



Publisher

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel. +49 (0)30 308 7748-0
Fax +49 (0)30 308 7748-29
E-mail info@ibu-epd.com
Web www.ibu-epd.com



Programme holder

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel. +49 (0)30 308 7748-0
Fax +49 (0)30 308 7748-29
E-mail info@ibu-epd.com
Web www.ibu-epd.com



Author of the LCA

Bundesverband der Gipsindustrie e.V.
Kochstrasse 6-7
10969 Berlin
Germany

Tel. +49 (0)30 3116 9822-0
Fax +49 (0)30 3116 9822-9
E-mail info@gips.de
Web www.gips.de



Sphera Solutions GmbH
Hauptstrasse 111-113
70771 Leinfelden-Echterdingen
Germany

Tel. +49 (0)711 341 817-0
Fax +49 (0)711 341 817-25
E-mail info@sphera.com
Web www.sphera.com



Holder of the Declaration

Bundesverband der Gipsindustrie e.V.
Kochstrasse 6-7
10969 Berlin
Germany

Tel. +49 (0)30 3116 9822-0
Fax +49 (0)30 3116 9822-9
E-mail info@gips.de
Web www.gips.de

